

CPS1500E

Emergency Power Systems

No More Need for the Worst-Case Scenario



LCD Display	AVR	External Battery
Noiseless	Pure Sine Wave	Quick Charge

CyberPower Inverter/ Emergency Power System (EPS) utilize state-of-art Microcontroller technology for the supply of lighting, generator, heater, refrigerator, motor, and other apparatus to provide resources during crisis or failure of regular systems. Pure Sine Wave output with the adjustable AVR feature is highly flexible to supply continuous power to various types of loads under all kinds of environments. The large LCD panel showcases comprehensive information including load level, battery level, voltage and other vital equipment status with a push-of-a-button.

The competitive design has not only make it the best choice generators but flexible enough to be adopted as UPS for computers and other sensitive equipment.

APPLICATIONS

- Electric Lighting
- Generator
- Heating System
- Refrigerator
- Motor
- Pump

SERIES FEATURES

- Noiseless, Fuel and Maintenance Free
- High Charging Current for Quick Recharging – Up to 5 times faster
- Bypass Mode Allows for Charge Only
- Generator Compatible Allows Longer Runtime
- Unlimited Battery Expansion Capability to Increase Runtime
- UPS Function for Auto-Changeover
- Affordable DC Input Voltage- Minimum 12V battery required
- Automatic Voltage Regulator (AVR)
- Brownout and Over Voltage Protector
- Multifunction LCD Readout
- Small & Light in Dimension
- Reverse Polarity Warning


AVR
AUTOMATIC VOLTAGE REGULATOR

Automatic Voltage Regulation

Automatic Voltage Regulation provides clean, consistent AC power by automatically regulating low voltages and over voltages, within defined tolerances, when incoming utility power has minor fluctuations.

Pure Sine Wave Output

For applications which require the highest level of line clarity for proper function, CyberPower Inverter/Emergency Power System are the perfect choices with its quality Pure Sine Wave output. They are designed for electronic devices that have Power Factor Correction (PFC) Power Supplies as well as for small AC motors and other devices that need true sine-wave power in order to function properly.

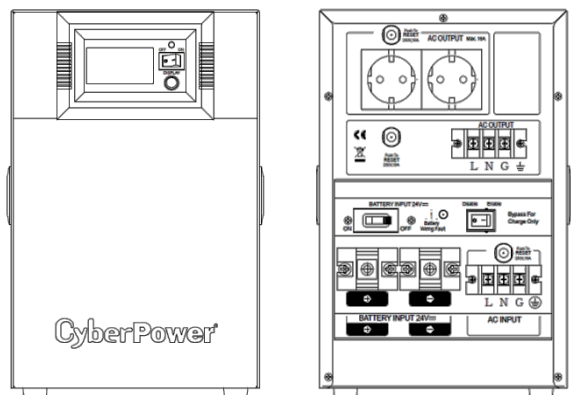

Front Panel

Back Panel

TECHNICAL SPECIFICATION

Model	CPS1500PIE
Configuration	
Capacity (VA / Watts)	1500 / 1050
Input	
Frequency Range	50/60Hz ± 5Hz (Auto-sensing)
DC Input Voltage	24V
Battery Pack Expansion	Yes
Output	
Number of Phase	Single Phase
UPS Outlets (Numbers)	(2) Schuko + (1) Terminal Block or (2) UK + (1) Terminal Block or (2) FR + (1) Terminal Block
On Battery Output Voltage	Pure Sine Wave at 220 Vac +/- 5%
On Battery Output Frequency	50 Hz / 60 Hz +/- 1%
Over Voltage Protection	Yes
Transfer Time (Typical)	< 10 ms
Overload Protection	On Utility: Circuit Breaker / On Battery: Internal Current Limiting
AVR	Double Boost & Single Buck
Charging Current	20Amps
Manual Switch Mode	Bypass Only
Surge Protection and Filtering	
Lightning / Surge Protection	Yes
Physical	
Dimensions (W x H x D) (mm)	206 x 261 x 325
Weight (kg)	18.6
Status Indicators	
Indicators	Power On
Audible Alarms	On Battery, Low Battery, Overload, Overcharge, Overheat
Multi-function LCD Readout	Yes

©2015 CyberPower Systems. All specifications are subject to change without notice.

LOAD RUNTIME

Battery Model	Loading Type	Loading (Watts)	2 Batteries	4 Batteries	6 Batteries	8 Batteries	10 Batteries
			Runtime in hours				
CPS1500PIE 200AH/12V	25%	250	19hrs 30mins	39hrs	58hrs 30mins	78hrs	97hrs 30mins
	50%	500	7hrs 40mins	15hrs 19mins	22hrs 98mins	30hrs 38mins	38hrs 18mins
	75%	750	4hrs 40mins	9hrs 19mins	13hrs 58mins	18hrs 38mins	23hrs 18mins
	100%	1000	3hrs 30mins	7hrs	10hrs 30mins	14hrs	17hrs 30mins

LOAD CHART

Appliance	Energy Saving Lamp	Standing Fan	32"LCD TV	Fridge/Freezer	Desktop PC	1.5HP Air Conditioner	Recommend EPS Models
Option 1	2	2	1	0	1	0	CPS600E
Option 2	4	4	1	1	1	0	CPS1000E
Option 3	6	4	2	1	2	0	CPS1500PIE
Option 4	8	2	2	1	2	0	CPS3500PIE/CPS3500PRO
Option 5	10	1	2	2	2	1**	CPS5000PIE/CPS5000PRO
Option 6	15	2	3	2	2	1***	CPS7500PIE/CPS7500PRO

*Load may vary depending on the condition of the appliance.

** 12,000 BTU *** 18,000 BTU

